



QUICK SETUP MGB V3...

CHANGING THE ACTUATING DIRECTION

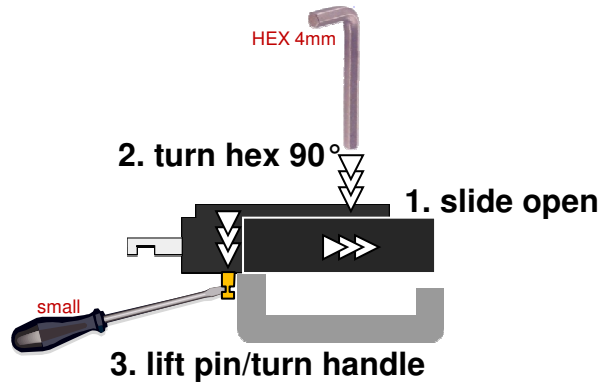


FIXING TO THE DOOR



Cover screws:

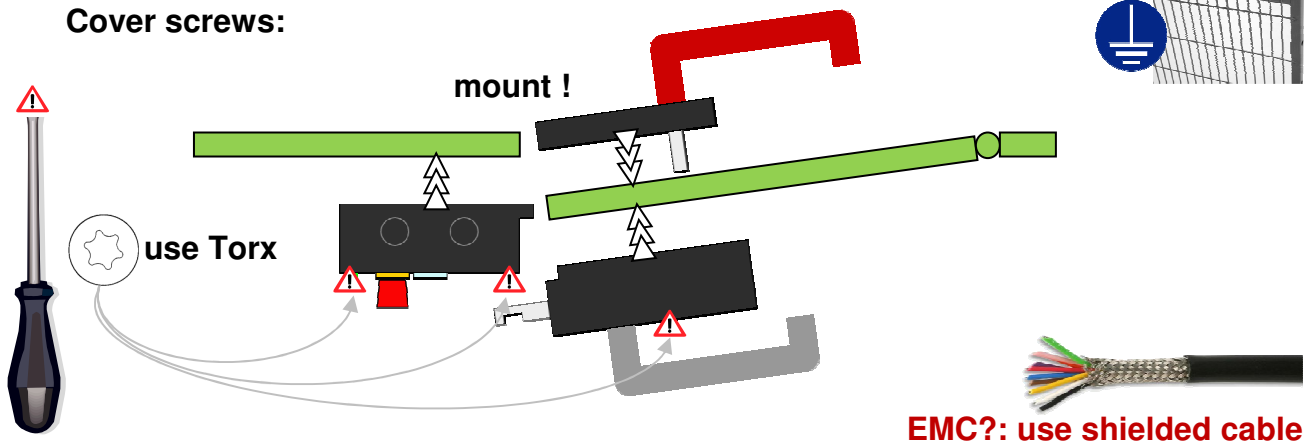

TEACHING

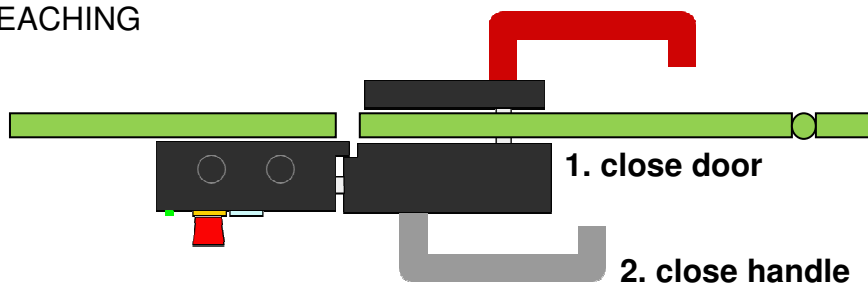


3. wire 24V to UA & UB and wire 2x 0V
4. wire 24V to inputs FI1A & FI1B (clean 24Vdc)
5. supply 24V (clean 24Vdc)
6. wait 60sec for teaching
7. teaching finished, make your final wiring




ADJUSTING GUARD LOCKING CONTROL

guard locking: 1 channel, 24V

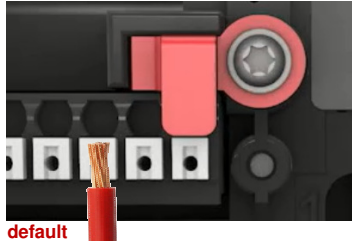


default

guard locking: 2 channel, 2x 24V

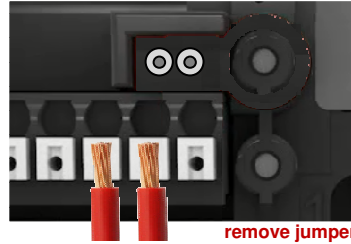

remove jumper

guard locking: 2 channel, 24V + 0V

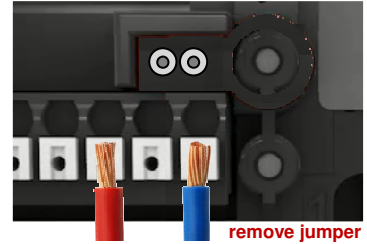

remove jumper

ADJUSTING DIP SWITCHES

1. remove all power from unit (cut all 24V)
2. set DIP switches in the desired configuration (A, B or C)
3. supply power to the unit for 5 sec (24V)
4. green DIA-led flashes 1x short (confirmation), green power led = ON
5. remove all power from unit (cut all 24V)
6. set DIP switch 5 to OFF
7. supply power to the unit (24V)
8. configuration finished / the new configuration is saved

use pointed object




(as of V2.2.0) DIP-switch 6:
OFF: no error after emergency release
ON: error after emergency release


A

NO SERIAL
WIRING


DEFAULT

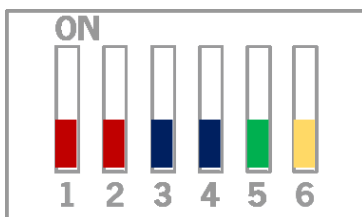

STEP1



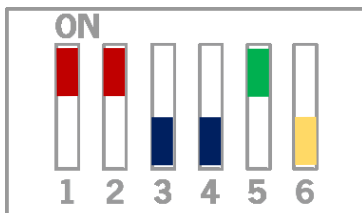


STEP2

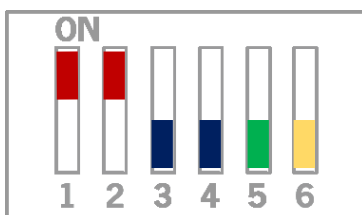

B

NO GUARD LOCK
MONITORING

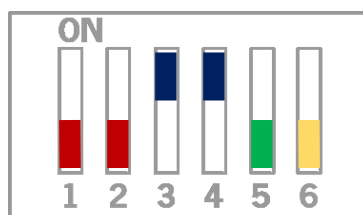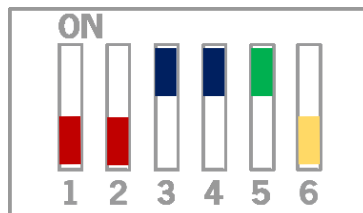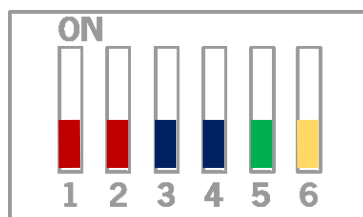

C

NO SERIAL
WIRING
&
NO GUARD LOCK
MONITORING

